


OCEAN MASTER RANGE

Standard equipment

- ORCA® Hypalon or PVC tube
- Welded seams (PVC)
- Flush mount non-return valves
- High tensile chromated & powder coated aluminum hull
- Self-draining deck
- Integrated transom supports
- Lifting points and towing eyes
- Tow bridle points
- Brushed foam teak finish deck
- Heavy duty rubbing strake
- Full length keel guard
- Desner dry bag
- Foot pump, oars, repair kit
- Console
- Seat
- Bow step

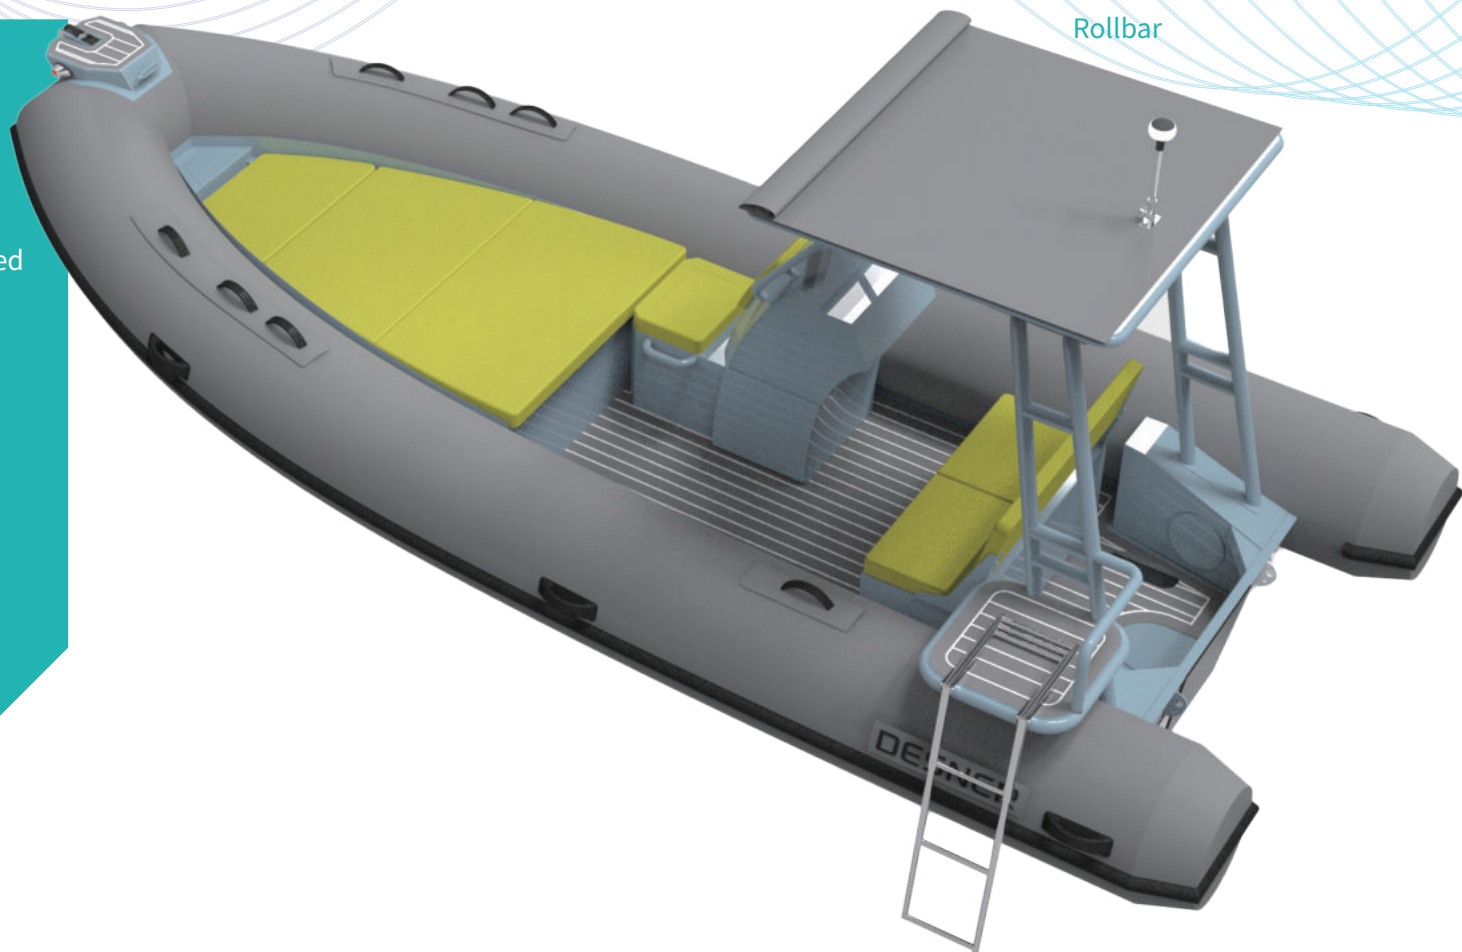

Optional Equipment

- T-TOP
- Jockey Console
- Steering system
- Boat cover
- Rollbar



BOATSTYPE	OVERALL LENGTH	INTERNAL LENGTH	OVERALL WIDTH	INTERNAL WIDTH	DEAD RISE	TUBE DIA	NUMBER OF AIR CHAMBERS	MAXIMUM LOAD	MAXIMUM PEOPLE	BOAT ONLY WEIGHT	MAXIMUM POWER	FUEL TANK	ENGINE SHAFT	DESIGN CATEGORY
OM420	4.20m 13'9"	3.25m 10'8"	1.99m 6'6"	1.07m 3'6"	20°	47cm 18.5"	4	820kg 1808lb	7	192kg 423lb	60hp	47L	L	C
OM480	4.80m 15'9"	3.85m 12'7"	2.00m 6'6"	1.07m 3'6"	20°	47cm 18.5"	5	944kg 2081lb	9	285kg 628lb	80hp	47L	L	C
OM500	5.06m 16'7"	4.05m 13'3"	2.25m 7'4"	1.20m 3'11"	24°	52cm 20.5"	6	1051kg 2317lb	10	410kg 904lb	100hp	82L	L	C
OM520	5.20m 17'	4.21m 13'9"	2.26m 7'5"	1.19m 3'11"	24°	52cm 20.5"	6	1158kg 2553lb	8	440kg 970lb	100hp	82L	L	C
OM520B	5.20m 17'	4.21m 13'9"	2.26m 7'5"	1.19m 3'11"	24°	52cm 20.5"	6	907kg 2000lb	8	460kg 1014lb	100hp	70L	L	C
OM560	5.65m 18'6"	4.50m 14'9"	2.44m 8'	1.32m 4'4"	24°	54cm 21"	6	1262kg 2782lb	12	500kg 1102lb	115hp	105L	XL	C