


PATROL RANGE



Standard equipment

- ORCA® Hypalon or PVC tube
- Welded seams (PVC)
- Flush mount non-return valves
- High tensile chromated & powder coated aluminum hull
- Self-draining deck
- Integrated transom supports
- Lifting points and towing eyes
- Tow bridle points
- Brushed foam teak finish deck
- Heavy duty rubbing strake
- Full length keel guard
- Desner dry bag
- Foot pump, oars, repair kit
- Console
- Seat
- Rollbar
- Bow step

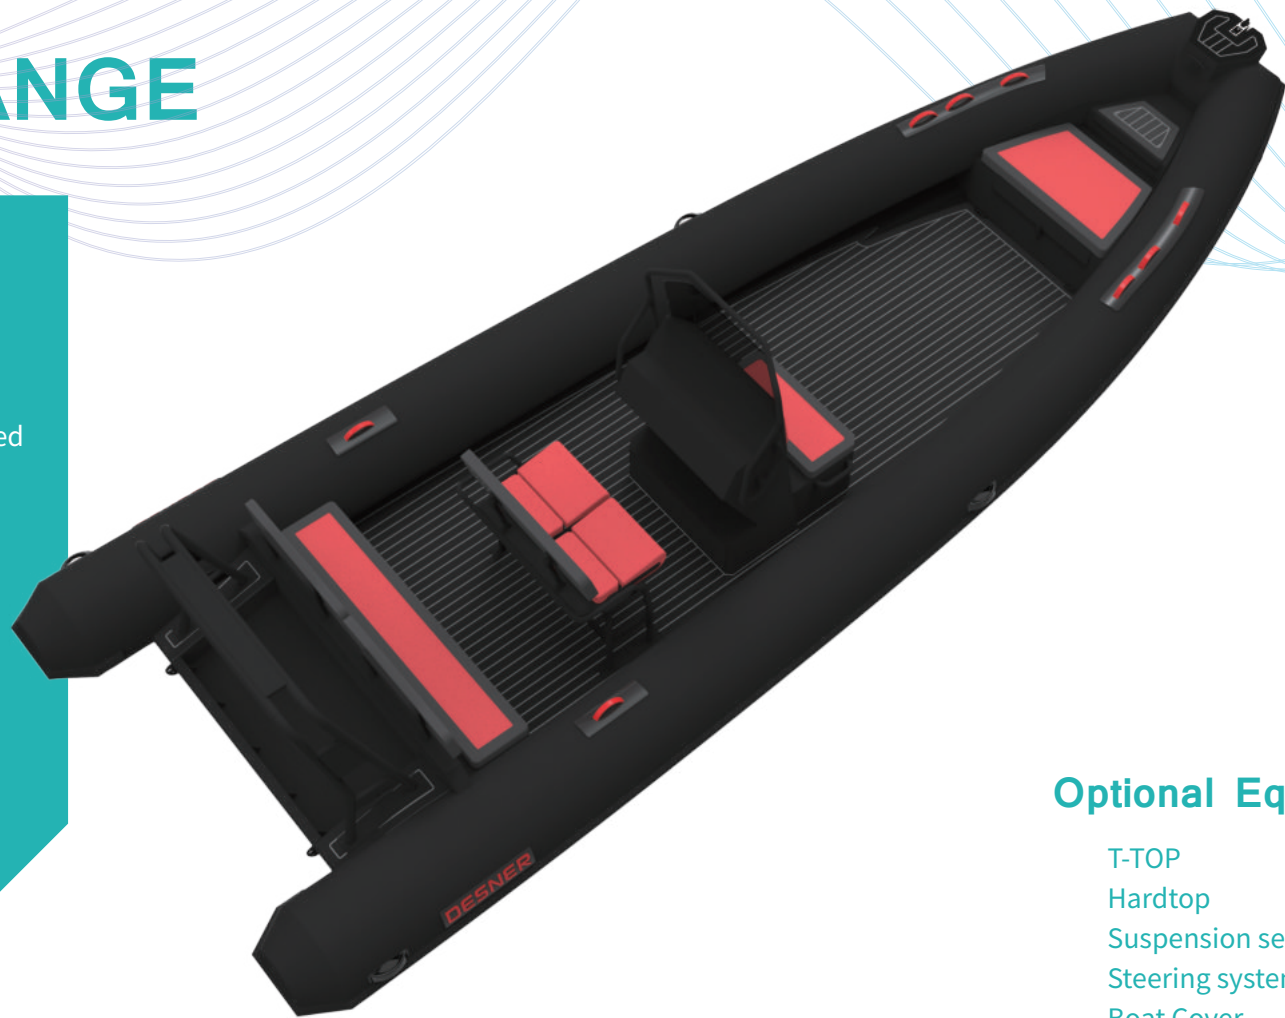

Optional Equipment

- T-TOP
- Hardtop
- Suspension seat
- Steering system
- Boat Cover
- Side Ladder
- Dlve rack

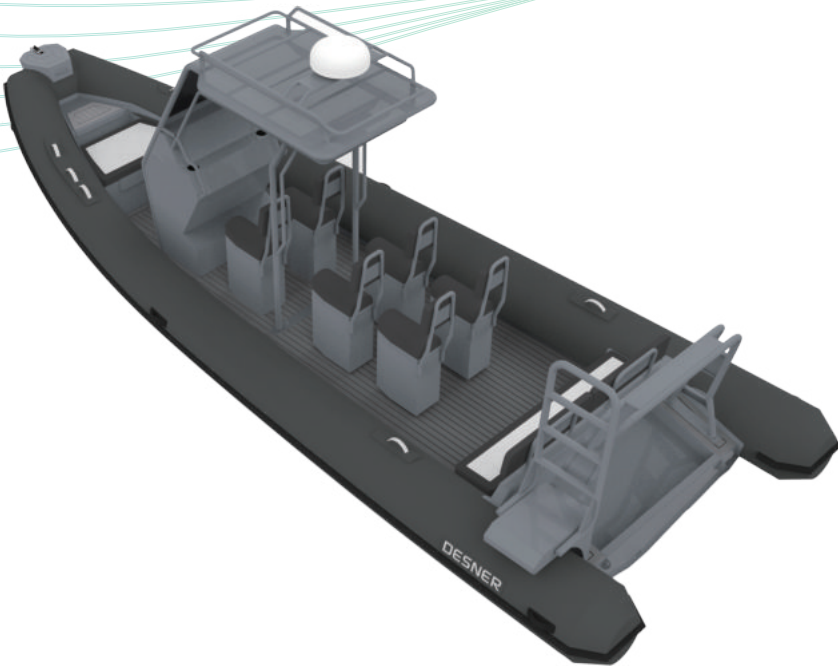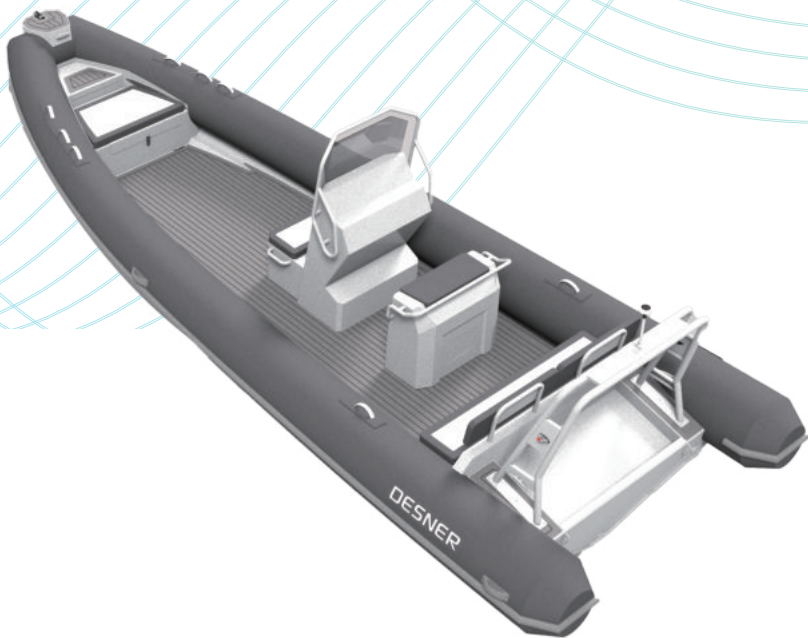

BOATSTYPE	OVERALL LENGTH	INTERNAL LENGTH	OVERALL WIDTH	INTERNAL WIDTH	DEAD RISE	TUBE DIA	NUMBER OF AIR CHAMBERS	MAXIMUM LOAD	MAXIMUM PEOPLE	BOAT ONLY WEIGHT	MAXIMUM POWER	FUEL TANK	ENGINE SHAFT	DESIGN CATEGORY
PA600	6.00m 19'8"	4.37m 14'4"	2.46m 8'10"	1.32m 4'4"	24°	56-40cm 22"-16"	6	1287kg 2837lb	12	694kg 1530lb	150hp	135L	XL	C
PA660	6.58m 21'7"	4.79m 15'8"	2.54m 8'4"	1.36m 4'5"	26°	58-43cm 22"-16"	6	1430kg 3153lb	13	720kg 1587lb	200hp	140L	XL	C
PA760	7.65m 25'1"	5.92m 19'5"	2.88m 9'5"	1.69m 5'6"	26°	58-43cm 22"-16"	6	1458kg 3214lb	14	970kg 2139lb	300hp	290L	XL	C
PA860	8.60m 28'3"	6.31m 20'8"	3.10m 10'2"	1.84m 6'	26°	58-43cm 22"-16"	6	1593kg 3512lb	15	1350kg 2976lb	2*300hp	405L	XL	B